




### Braided Roundup Roundslings

Braided Roundslings provide greater security in handling high-capacity loads, while maintaining the qualities our other roundslings offer. Braided Roundslings are constructed using 3 (6-part) or 4 (8 part) Endless Roundup Roundslings.


Braided Roundslings offer superior performance in a vertical, choker or basket hitch.

- Eyes are covered with abrasion-resistant nylon
- Soft, flexible, and easy to handle
- Conform well to load
- Excellent strength-to-weight ratio
- Capacities are color coded
- Red Core Warning Fibers alert user to damage
- Each sling is tagged for easy identification

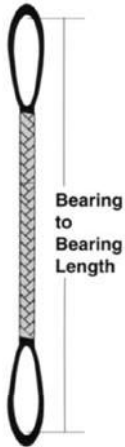

6-Part Braided Round Slings		*Capacity in lbs.			Min. Length	Standard Eye Length	Approx. Weight per Foot	Width Under Load
Part No.	Color Code	Vertical	Choker	Vertical Basket				
6BR1	Purple	6700	5300	13400	5'	14"	1.1 lb.	3.25"
6BR12	Green	13500	10800	27000	5'	15"	1.45 lb.	3.75"
6BR3	Yellow	21400	17100	42800	6'	18"	1.9 lb.	4.25"
6BR4	Tan	27000	21600	54000	6'	18"	2.25 lb.	4.50"
6BR5	Red	33600	26800	67200	7'	25"	3.0 lb.	5.25"
6BR6	White	42800	34200	85600	7'	25"	3.5 lb.	5.50"
6BR7	Blue	54000	43200	108000	9'	30"	4.95 lb.	6.63"
6BR8	Orange	63700	50900	127400	10'	33"	6.0 lb.	8.25"
6BR9	Orange	79000	63200	158000	10'	38"	7.75 lb.	11.0"

**WARNING: \*DO NOT EXCEED RATED CAPACITY**

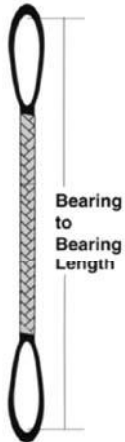

8- Part Braided Roundslings		*Capacity in lbs.			Min. Length	Standard Eye Length	Approx. Weight per foot	Width Under Load.
Part No.	Color Code	Vertical	Choker	Vertical Basket				
8BR1	Purple	9000	7200	18000	5'	14"	1.4 lb.	3.50"
8BR2	Green	18000	14400	36000	5'	15"	1.85 lb.	4.00"
8BR3	Yellow	28500	22800	57000	6'	18"	2.40 lb.	4.75"
8BR4	Tan	36000	28800	72000	6'	18"	2.85 lb.	5.00"
8BR5	Red	44900	35900	89800	7'	25"	3.8 lb.	6.00"
8BR6	White	57100	45600	114200	7'	25"	4.4 lb.	6.25"
8BR7	Blue	72000	57600	144000	9'	30"	6.25 lb.	7.50"
8BR8	Orange	85000	68000	170000	10'	33"	7.6 lb.	9.50"
8BR9	Orange	105300	84200	216000	10'	38"	9.75 lb.	13.0"

**LARGER CAPACITIES AVAILABLE UPON REQUEST**

**FOR MORE INFORMATION, CONTACT US AT (800) 220-2579**